Technical information
Remeha P 200

Pressurized boiler

• Heat output: 59 - 256 kW







TABLE OF CONTENT

Pr	reface	4	7	Assembly guidelines and installation				
				requ	uirements	9		
1	Description of the unit	4		7.1	General	Ç		
	1.1 General	4		7.2	Water connections	(
	1.2 Burners	4		7.3	Delivery in individual parts	Ç		
					7.3.1 General	Ç		
2	Construction data	4			7.3.2 Boiler assembly	(
	2.1 General	4		7.4	Delivery assembled (4 to 7 sections only)	(
	2.2 Sections	4						
	2.3 Casing	4	8	Instrument panels				
				8.1	Equipment contents	1		
3	Technical data and dimensions	5		8.2	Instrument panel High/Low with hours run			
	3.1 Dimensions	5			meters	1		
4	3.2 Technical data	5		8.3	Wiring diagram instrument panel High/Low			
	3.3 Quotation specifications	6			with hours run meters 1	12		
4	Output data		9	Commissioning				
	4.1 Boiler efficiency	6		9.1	Pressurized boiler with gas burner	13		
	4.2 Combustion efficiency	6			9.1.1 Commissioning procedure	13		
					9.1.2 Putting out of operation	13		
5	Application data	7		9.2	Pressurized boiler with oil burner	13		
	5.1 L.P.H.W. version	7			9.2.1 Commissioning procedure	13		
	5.1.1 Water temperature	7			9.2.2 Putting out of operation	13		
	5.1.2 Water pressure	7						
	5.1.3 Flow rate	7	10	Faul	t finding	13		
	5.1.4 Water treatment	7						
	5.2 Economisers	7	11	Mair	ntenance recommendations	14		
	5.3 Flue gas discharge	7		11.1	General	14		
	5.4 Noise production	8		11.2	Maintenance instructions	14		
6	Installation requirements 6.1 Installation recommendations in the boiler	8						
	house	8						

PREFACE

These technical instructions contain useful and important information for the correct operation and maintenance of the Remeha boiler, model P200

Read these instructions carefully before putting the boiler into operation, familiarise yourself with it's control functions and operation, strictly observing the instructions given. Failure to do so may invalidate warranty or prevent the boiler from operating.

The installation and commissioning of the boiler must be carried out by a competent Engineer, with the relevant certification i.e.: CORGI, ACOPS, IEE regs. etc. On completion a copy of the boiler log / commissioning sheet should be returned to Broag Ltd for record purposes.

If you have any questions, or if you need more information about specific subjects relating to this boiler, or it's installation please do not hesitate to contact us.

The data published in these technical instructions is based on the latest information (at date of publication) and may be subject to revisions.

We reserve the right to continuous development in both design and manufacture, therefore any changes to the technology employed may not be retrospective nor may we be obliged to adjust earlier supplies accordingly.

1 DESCRIPTION OF THE UNIT

1.1 General

High efficiency pressurized boiler, suitable for use with natural gas and light oil, by means of a pressure jet burner. Also available with a condensing unit (ECO) (for natural gas only).

Up to 141 kW (7 sections) the Remeha P 200 can be delivered assembled (except for casing and instrument panel).

The boiler meets the requirements of the CE regulations in the following directives:

- Gas appliance directive no. 90/396/EEC
- Electrical low voltage directive no. 73/23/EEC
- E.M.C. directive no. 89/336/EEC
- Efficiency directive no. 92/42/EEC.

Classification type for evacuation of the combustion products: B23.

1.2 Burners

In principle all CE-approved pressure jet burners are suitable, subject to prior adjustment to the boiler capacity and boiler construction. The individual boiler satisfies inspection requirement for central heating boilers.

2 CONSTRUCTION DATA

2.1 General

The boiler block consists of cast iron sections which are assembled by means of tapered nipples. The boiler is a three pass design. The boiler block is insulated with a 80 mm thick layer of glass wool.

2.2 Sections

The sections are made of pearlitic cast iron. Weights and measures of the sections:

Front section: 59 kg H x W = 630 x 540 mm
Intermediate section: 58 kg H x W = 630 x 540 mm
Rear section: 61 kg H x W = 630 x 540 mm

2.3 Casing

Steel casing, finished with a high-quality insulation. The front door is suitable for left or right opening as desired.

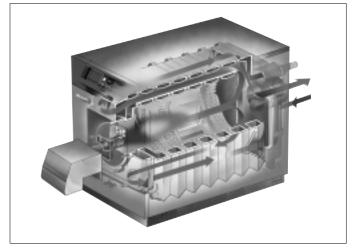


Fig. 01 Remeha P200

IL4



3 TECHNICAL DATA AND DIMENSIONS

3.1 Dimensions

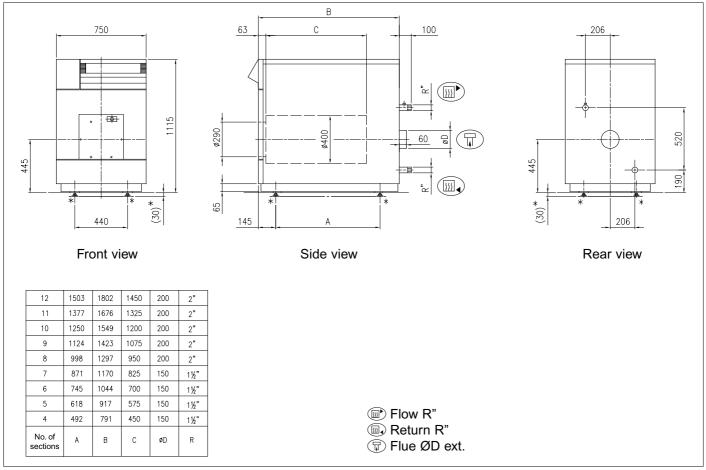


Fig. 02 Dimensions

3.2 Technical data

Number of sections			4	5	6	7	8	9	10	11	12
Nominal heat	output	kW	34 - 59	40 - 93	46 -117	52 -141	58 -165	65 -184	71 -206	77 -229	83-256
Nominal	Hi / NCV	kW	66	103	129	155	181	202	225	250	278
heat input	Hs / GCV	kW	73	114	143	172	201	224	250	278	309

^{*} If the boiler is delivered with adjustable feet (standard for assembled delivery 4 to 7 sections) the boiler will be approximately 30 mm higher.

Remeha P 200

	Α	mm	492	618	745	871	998	1124	1250	1377	1503
	В	mm	791	917	1044	1170	1297	1423	1549	1676	1802
Dimensions	С	mm	450	575	700	825	950	1075	1200	1325	1450
	ØD	mm	150	150	150	150	200	200	200	200	200
	R	"	1½"	1½"	1½"	1½"	2"	2"	2"	2"	2"
Water	Δ t = 10°C	mbar	9	22	34	48	67	84	103	127	158
resistance	∆ t = 20°C	mbar	2	5	8	12	17	21	26	32	39
Water contents		litre	24	29	34	39	44	49	54	59	64
Boiler weight (dry)		kg	365	425	485	545	605	665	725	775	835
Combustion chamber resistance ¹⁾		mbar	0.1	0.3	0.6	1.0	1.2	1.6	1.4	1.8	2.1
Combustion gas side content		m ³	0.08	0.11	0.13	0.16	0.18	0.21	0.23	0.26	0.28
Flue gas flow rate		kg/h	103	161	201	242	282	315	351	390	434

Table 01 Technical data

3.3 Quotation specifications

- Heat exchanger manufactured from corrosion resistant "pearlite" cast iron
- Maximum operating pressure of 6 bar
- Maximum operating temperature of 95°C
- Sectional design with three passes for max efficiency (gross 83%) and a generously sized combustion chamber for minimising NOx production
- Water cooled base and rear sections
- Large insulated door (hinged left or right) allowing easy access for service operations
- Supplied in broken down form for ease of delivery and site access

- Powder coated enamel steel casing
- 80 100 mm thick glass wool insulation
- Suitable for use with a Natural gas, and/or 35 sec oil fired pressure jet burner (matched with most popular burner manufacturers)
- Supplied as standard with on/off switch, temperature indication, control and high limit thermostats
- Efficiency 83% (Hs GCV)
- Manufactured to ISO 9001
- CE approved.

4 OUTPUT DATA

4.1 Boiler efficiency

Up to 91.7 % at Hi (82.6 % at Hs) at full load and up to 93.2 % at Hi (84.0 % at Hs) at part load. Average water temperature 70° C (80/60°C).

4.2 Combustion efficiency

Up to 93.0 % at Hi (83.8 % at Hs) at full load and up to 95.5 % at Hi (86.0 % at Hs) at part load.

Note: Hi = NCV ; Hs = GCV

¹⁾ Determined with 20 % excess air.



5 APPLICATION DATA

5.1 L.P.H.W. version

5.1.1 Water temperature

Maximum water temperature is 110°C.

The minimum acceptable return water temperature is, for gas fired boilers 45°C and for oil fired boilers 40°C, at a flow rate corresponding to a Δt of 20°C at nominal heat output.

5.1.2 Water pressure

Maximum pressure 6 bar.

The boiler is suitable for open and sealed systems up to a maximum pressure of 6 bar and a minimum pressure of 0.8 bar. The boiler is suitable for installation in basement or rooftop boiler houses.

5.1.3 Flow rate

The minimum flow rate through the boiler is obtained from the following formula:

nominal heat output (kW) = m³/h

This minimum flow must be maintained for 5 minutes after the burner stops firing to avoid high temperature shut-down due to residual heat gain. Due to the design and manufacture of the boiler no specific minimum water flow requirement exists other than for over-temperature protection.

5.1.4 Water treatment

The system should be filled with mains cold water (for the UK this will usually have a pH of between 7 and 8). Pressurised installations with a boiler/system content ratio of 1:10 or less should not require water treatment, provided that the following conditions apply:

- The system is flushed thoroughly to remove all fluxes and debris and then filled completely once.
- 2. Make up water is limited to 5 % per annum.
- 3. The hardness of the water does not exceed 360 ppm (20°D).

All scale deposits will reduce the efficiency of the boiler and should be prevented. However provided the above is complied with any scale produced will not be too detrimental to the boiler efficiency and will not reduce the anticipated life expectancy of the boiler.

NOTE: Scale deposits in excess of 3 to 5 mm will reduce boiler efficiency and greatly increase the risk of premature casting failure.

As most systems contain a variety of metals which can react with each other to cause corrosion. It is considered good practice to provide some form of water treatment (especially in open vented systems) in order to prevent or reduce the following:

- Metallic corrosion;
- Formation of scale and sludge;
- Microbiological contamination;
- Chemical changes in the untreated system water.

Suitable chemicals and their use should be discussed with a specialist water treatment company prior to carrying out any work. The specification of the system and manufacturers recommendations must be taken into account, along with the age and condition of the system. New systems should be flushed thoroughly to remove all traces of flux, debris, grease and metal swarf generated during installation. Care to be taken with old systems to ensure any black metallic iron oxide sludge and other corrosive residues are removed, again by thoroughly flushing, ensuring that the system is drained completely from all low points.

NOTE: Please ensure that the new boiler plant is not in circuit when the flushing takes place, especially if cleansing chemicals are used to assist the process.

<u>Under no circumstances is the boiler to be operated with cleaning chemicals in the system.</u>

To summarise:

- Minimise water loss;
- Prevent pumping over in open vented systems;
- Provide adequate air venting at all high points;
- Keep pH level between 7 9 when using additives;
- Maximum chlorine content of 200 mg/l;
- Take advice on the suitability of inhibitors.

5.2 Economisers

ECO's can be delivered upon request (for natural gas only).

5.3 Flue gas discharge

For the discharge of the flue gases, chimney draught is not required.

Tests have shown that very good combustion results are obtained with zero draught at the boiler outlet.

5.4 Noise production

The noise level taken at a distance of 1 m around the boiler is approximately 70 to 85 dBA. The noise level at the chimney outlet will, depending on load, type of burner and chimney situation, vary from 70 to 90 dBA, measured at a distance of 1 m from the outlet. If this noise production gives rise to problems in the immediate vicinity, then noise reducing or absorbing measures should be taken.

The values that have been measured are averages obtained from various measurements carried out at a distance of approximately 1 m around the boiler and at a height of approximately 1 m.

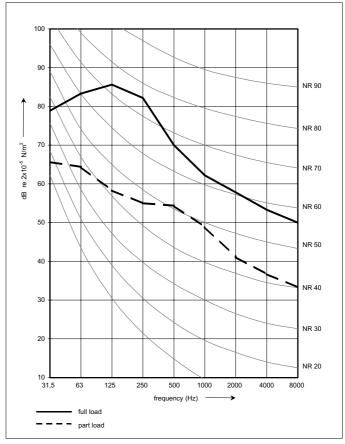


Fig. 03 Noise level readings without burner silencer

6 INSTALLATION REQUIREMENTS

6.1 Installation recommendations in the boiler house

The necessary minimum installation space of the boiler can be seen from Fig. 04

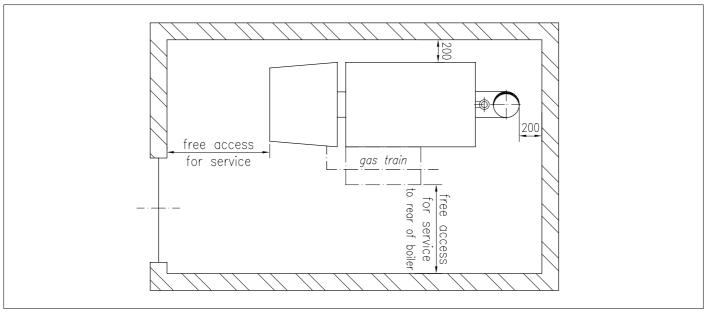


Fig. 04 Installation recommendations in the boiler house 04.15D.79.00001



7 ASSEMBLY GUIDELINES AND INSTALLATION REQUIREMENTS

7.1 General

The Remeha boilers P 200 - 4 to 7 sections can be delivered in individual parts or assembled.

The Remeha boilers P 200 - 8 to 12 sections are delivered in individual parts.

7.2 Water connections

The water connections are at the rear of the boiler. The flow and return connections consist of threaded male connections:

- 4 7 sections 1 ½" BSP
- 8 12 sections 2" BSP

Flange connections in accordance with DIN 2633 can be delivered on request (Ø 70 mm ID). The return connection is provided with a G ¾" threaded hole in which a drain off cock is fitted.

At the front of the boiler a flange is provided with 3 x G $\frac{1}{2}$ " threaded holes for the fitting of the thermostat pockets.

7.3 Delivery in individual parts

7.3.1 General

The sizes of the boiler parts are such that they all can enter the boiler house through a normal entrance. The casing and equipment parts are delivered in packaged units. If necessary, the boiler can be put into operation without casing. The casing can be added at a later stage without dismantling the water connections. On request the boiler can be delivered with adjustable boiler feet (standard for assembled delivery 4 to 7 sections).

7.3.2 Boiler assembly

Assembly and installation of a boiler delivered in individual parts should only be undertaken by a recognized and approved engineer and in accordance with the assembly manual. Local regulations laid down by the relevant authorites must be adhered to.

7.4 Delivery assembled (4 to 7 sections only)

The boiler is delivered completely assembled in a crate and on a pallet. Just the casings and the instrument panel are delivered seperate in package units in the crate. The boiler is delivered with adjustable boiler feet (Fig. 05). By unscrewing the boiler feet, the boiler lifts itself up from the pallet. The pallet can now be dismantled and taken away (Fig. 06). Now the boiler level can be adjusted horizontally and in the right height (Fig. 07). After the installation of the boiler, the casings and the instrument panel can be fitted (figure 08).

If necessary, the boiler can be put into operation without casing. The casing can be added at a later stage without disconnecting the water connections.




Fig. 05 The boiler completely assembled in a crate and on a pallet.

00.13C.79.00010, afb 1

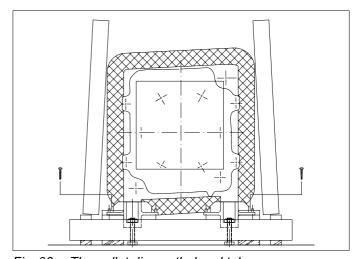


Fig. 06 The pallet dismantled and taken away 00.13C.79.00010, afb 2




Fig. 07 The boiler adjusted horizontal and at the right height

00.13C.79.00010, afb 3

Remeha P 200

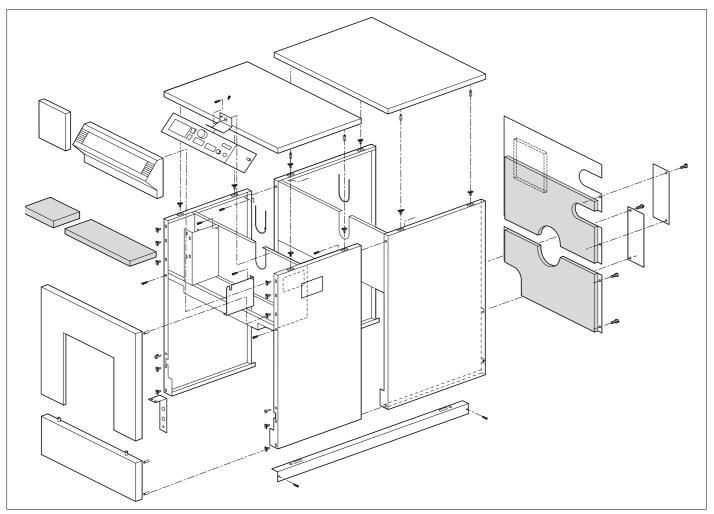


Fig. 08 Mounting casings and the instrument panel.



8 INSTRUMENT PANELS

8.1 Equipment contents

The panels contain all the necessary control and measuring instruments required to control the boiler. The connections have to be made on a terminal strip. The capillaries and sensor wires, which come from the control panel, are placed in the instrument pockets that are fitted at the front of the boiler.

See par. 8.2 for an instrument panel High/Low with hours run meters. Several extra options can be built into the panels.

Ask our technical departement.

8.2 Instrument panel High/Low with hours run meters

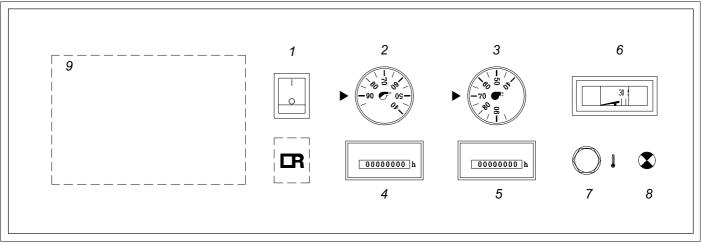


Fig. 09 Layout of the instrument panel High/Low with hours run meters 00.03F/79.00004

- 1. Operating switch (On/Off)
- 2. Control thermostat; setting between 35°C 95°C
- 3. High/Low thermostat; setting between 35°C 95°C
- 4. Hours run meter total running hours
- 5. Hours run meter full load running hours
- 6. Analoque thermometer water temperature
- 7. High limit thermostat 110°C (lock out)
- 8. Lock out warning lamp
- 9. Option for *rematic*® weather compensator

8.3 Wiring diagram instrument panel High/Low with hours run meters

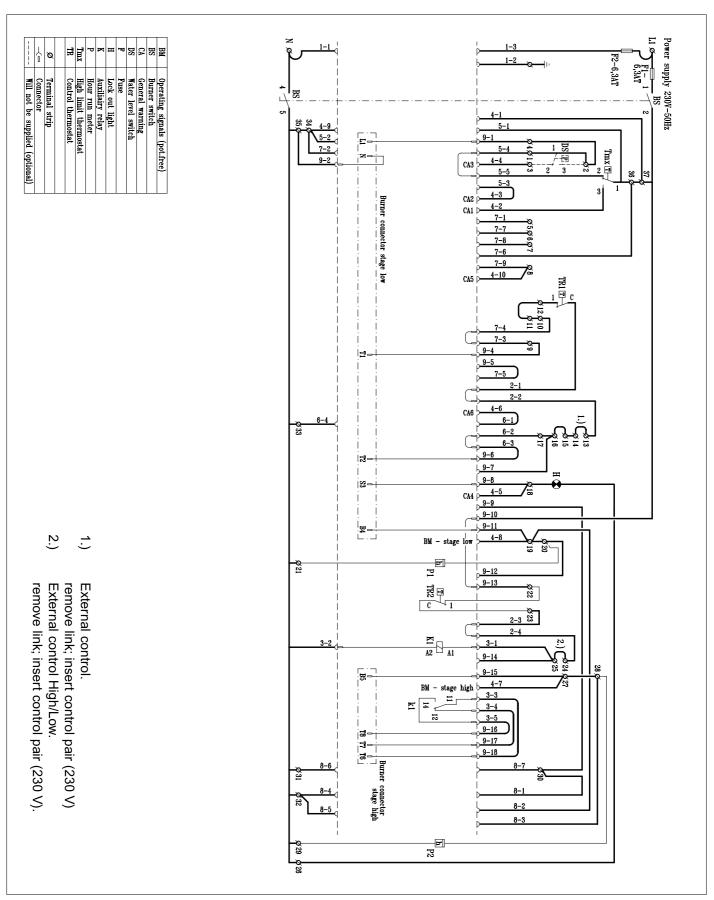


Fig. 10 Wiring diagram instrument panel High/Low with hours run meters



9 COMMISSIONING

Note:

Commissioning to only be carried out by a qualified engineer with the relevant training and certification i.e. Acops-Corgi and a commissioning data sheet completed on site for issue to owner.

9.1 Pressurized boiler with gas burner

9.1.1 Commissioning procedure

If the boiler is to be put into operation again following a period of non-use, then the following procedure must be carried out :

- Open the main gas cock.
- Switch the weather-compensator (if fitted) over to manual operation ((())).
- Turn the thermostats to their highest setting.
- Switch on the circulation pump.
- Switch on the main switch.
- Switch on the operation switch in the instrument panel.
- Consult burner manufacturers commissioning details.

Warning

If the instrument panel is fitted with a weather compensator, set the programm switch to 'manual' position (). The following will now take place:

- The gas burner fan will start running so that during the purging time the combustion chamber will be ventilated with the air damper fully opened.
- The air damper will then go into start position.
- Ignition flame lights up and is checked.
- Then the control box gives the all clear signal for the burner to switch over to full load.

9.1.2 Putting out of operation

It is sufficient to switch off the operation switch on the instrument panel. It is **important** that in the event of work being carried out on the burner, the boiler/burner unit must be completely electrically isolated and the main gas cock must be shut.

9.2 Pressurized boiler with oil burner

9.2.1 Commissioning procedure

If the boiler is to be put into operation again following a period of non-use, then the following procedure must be carried out :

- Open the main oil cock.
- Switch the weather-compensator (if fitted) over to manual operation ().
- Turn the thermostat to their highest setting.
- Switch on the circulation pump.
- Switch on the main switch.
- Switch on the operation switch in the instrument panel.
- Consult burner manufacturer commissioning details.

Warning

If the instrument panel is fitted with a weather compensator, set the programm switch to 'manual' position (). The following will now take place:

- The oil burner fan will start running so that during the purging time the combustion chamber will be ventilated with the air damper fully opened.
- The air damper will then go into start position.
- Ignition flame lights up and is checked.
- Then the control box gives the all clear signal for the burner to switch over to full load.

9.2.2 Putting out of operation

It is sufficient to switch off the operation switch on the instrument panel. It is **important** that in the event of work being carried out on the burner, the boiler/burner unit must be completely electrically isolated and the main oil cock must be shut.

10 FAULT FINDING

High Limit thermostat lock out:

- Check the water circulation (circulation pump). Reset the High Limit thermostat (Reset button is on the instrument panel under the cover cap of the High Limit thermostat).
- Advise the installer in the event of continued lock outs.

11 MAINTENANCE RECOMMENDATIONS

11.1 General

Depending on the operational conditions, the block and the burner must be checked and cleaned at least once a year for gas and at least twice a year for oil.

11.2 Maintenance instructions

Cleaning of the boiler:

- Put boiler out of operation.
- Open the front door, if necessary after dismantling the
- Remove the retarders (only for the 4 9 sections).
- Clean the combustion chamber and flue passes using a suitable brush.
- Clean the removed retarders (4 9 sections).
- Remove the rear panel of the boiler and remove the cleaning cover (underneath the smoke box).
- Vacuum clean the boiler and the combustion chamber.
- Renew the front door seals after cleaning the boiler.
- Re-assemble the removed parts and close the front door
- Re-assemble the burner (if dismantled).
- Check the boiler combustion side for leakage.
- Check the equipment for proper functioning and if necessary re-adjust the control and safety equipment.
- Carry out combustion analysis.
- Check the water connections.



Broag Ltd.

Head office

Remeha house

Molly Millars Lane

Wokingham,

Berkshire RG41 2QP

Tel.: 0118 978 3434

Fax: 0118 978 6977

E-mail address:

boilers@broag.ltd.uk.

Branch office

Unit 3, Kestrel Close,

Quarry Hill ind. Estate,

Ilkeston

Derbyshire DE7 4RD

Tel.: 0115 944 0778

Fax: 0115 944 0588

© Copyright

All technical and technological infor-mation contained in these technical instructions, as well as any drawings and technical descriptions furnished by us remain our property and shall not be copied in part or whole without our prior consent in writing.







