



Designio Frame Installation Instructions

**For use with Gas Riva 53, Gas or Electric Riva 67,
16" VFC Convector, 22" VFC Convector,
Logic Hotbox and Logic Convector
and Logic E-box™**

**Gazco Limited, Osprey Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7JG
Tel: (01392) 261999 Fax: (01392) 444148 E-mail: info@gazco.com**

A member of the Stovax Group

INSTALLATION INSTRUCTIONS

Covering the following frames

8251MA 16"
8252MA 22"
8272MA E-box

8644MA Riva 53
8634MA Riva 67


For use with Gas Riva 53, Gas or Electric Riva 67, 16" VFC Convector, 22" VFC Convector, Logic Hotbox, Logic Convector and Logic E-box

These instructions are supplemental to, and must be read in conjunction with, the installation instructions supplied with the fire. Read both thoroughly before installing the appliance.



Fitting of this frame should be carried out after the fire has been installed but before any commissioning tests that may be required.

1. FITTING



- 1.1 Take notice of the locating areas situated at the top of the fire as these secure the back of the frame to the fire. See diagram 1.

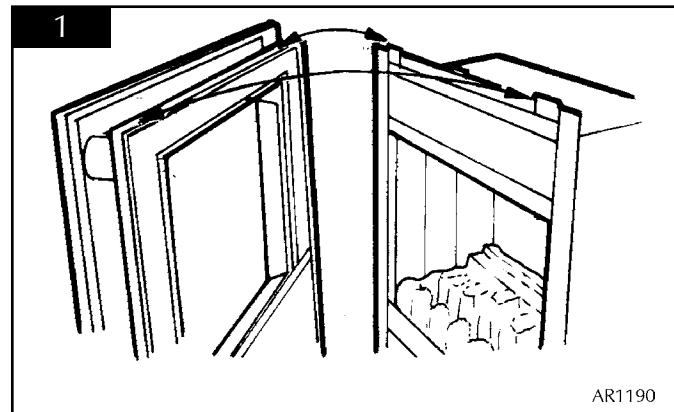

- 1.2 Place the back of the frame over the locating areas and push down to ensure rigid fixing.
Important: ensure all three lugs have engaged. See diagram 1.
- 1.3 Open the door and secure the frame at the base using the two screws as shown. See appropriate diagram.

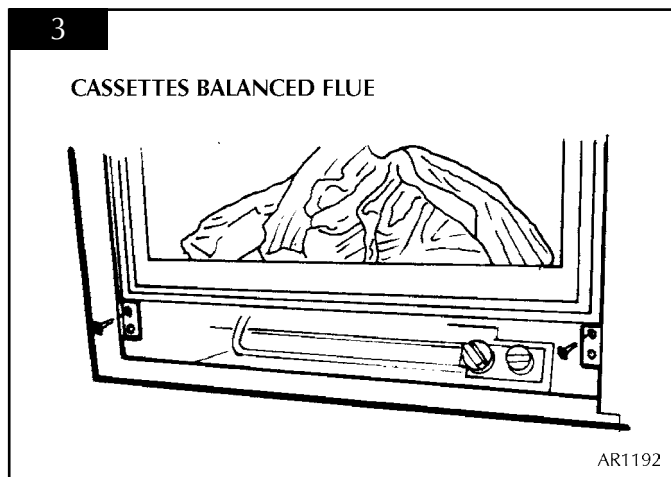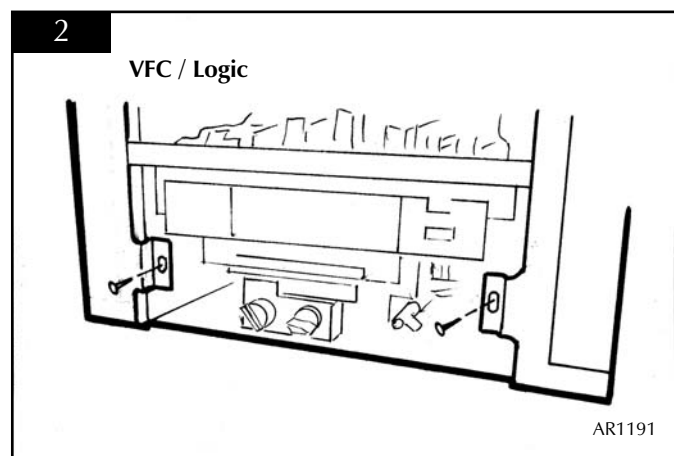


- 1.4 If you are installing a Riva 67 with a conventional flue, this will require the two special brackets supplied. See diagram 4.

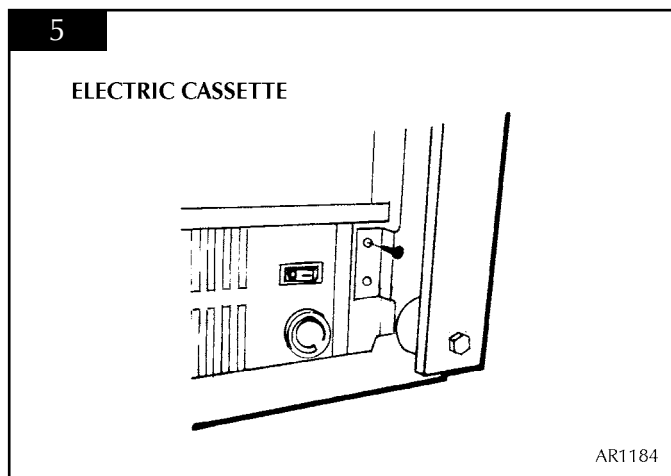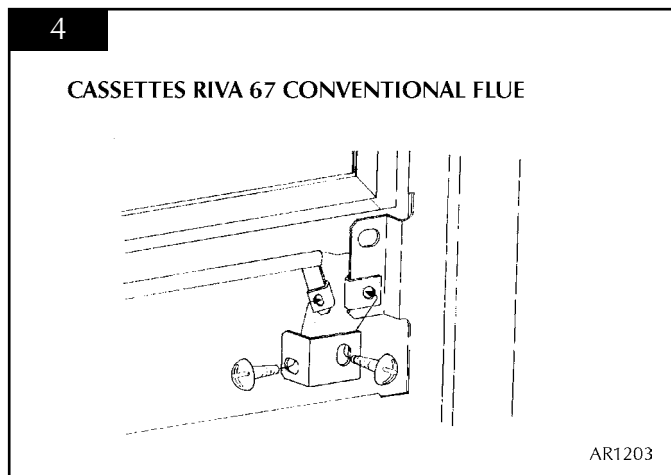

- 1.5 Check the operation of the door and that the magnet hold the door shut when in the closed position.

2. OPENING THE DESIGNIO

- 2.1 When the frame is fitted, the front door may be opened by placing your hand at the lower right hand side and pulling forward. See diagram 6.

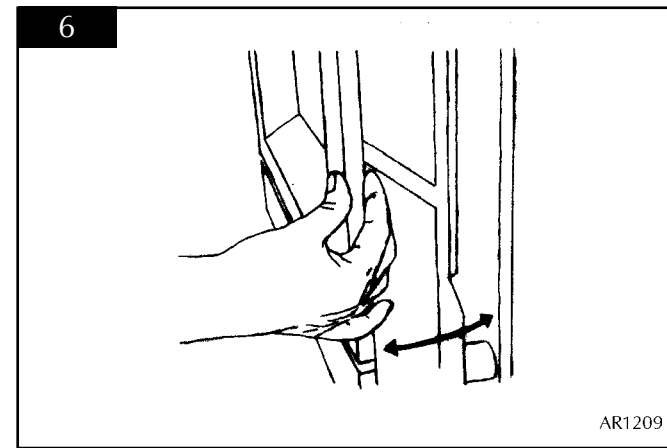

IMPORTANT: The front becomes hot whilst in operation. Ensure the door is opened by placing your hand in the position shown in diagram 6.

3. COMMISSIONING

- 3.1 Where commissioning tests are detailed in the installation instructions supplied with the fire, now carry them out.
- 3.2 Ensure that this set of instructions is attached to the instructions for the fire and leave with the user.

4. CLEANING THE FRAME

- 4.1 Only clean the frame when it is cold.
- 4.2 Do not use abrasive cleaners.
- 4.3 Wipe with a damp cloth and buff with a clean, lint-free duster.

FIXING KIT COMPONENTS

COMP. No.	DESCRIPTON	QUANTITY
PR0699	Instructions	1
FA 0041	Spire Clip	2
FA 0198	No. 8 x 3/4 Black Washer HD Pozi	2
GZ4136	Angle bracket (LH)	1
GZ4137	Angle bracket (RH)	1